

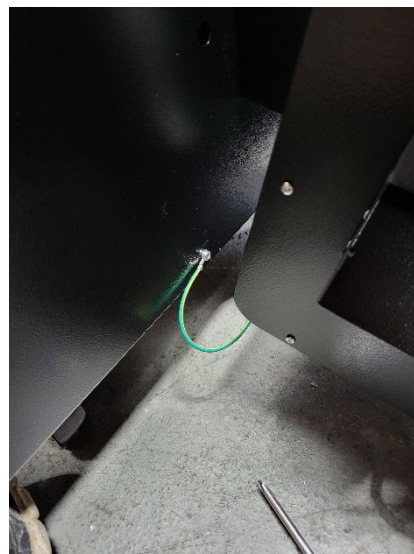



Pellet Pro® Vertical Pellet Smoker Installation Manual

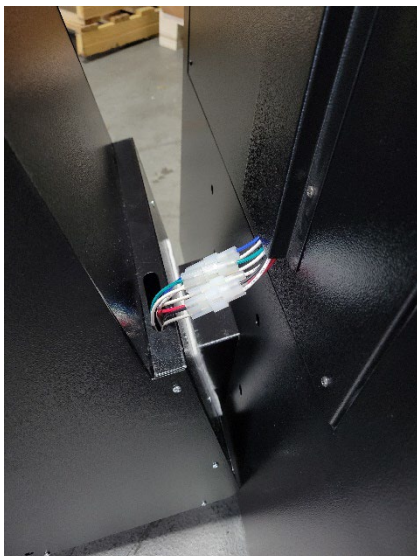

- 1) Remove all parts from the inside of the smoker and remove all cellophane.
- 2) Flip the smoker on its back side and attach the four casters to the bottom corners of the smoker using the smaller bolts provided. It is optional to attach the swiveling casters on the left or right side.
- 3) Once the casters are attached to the bottom of the smoker, flip the smoker upright.
- 4) Insert the hopper assembly to the side of the cabinet and connect the (4) corresponding color-coded Molex connectors. Then, connect the ground wire to the bottom of the cabinet. See pictures below.

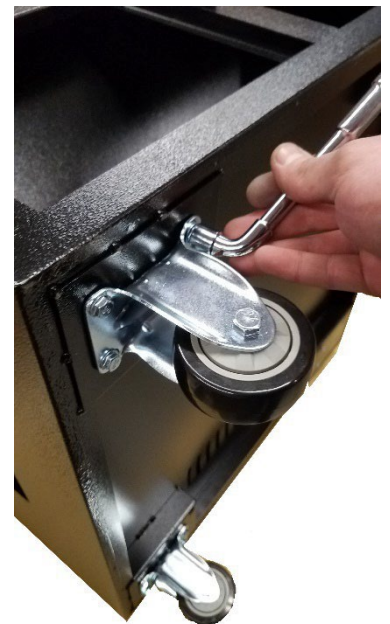

5. Using the (4) Large M6 Bolts and Washers provided, secure the hopper assembly to the cabinet from the inside of the cabinet. (This is easiest with two people.)
6. Locate the PID Controller Housing and remove the mounting piece by loosening the large set screw.
7. Attach the mounting piece to the cabinet using the screws that are affixed to the cabinet. See picture to the right.



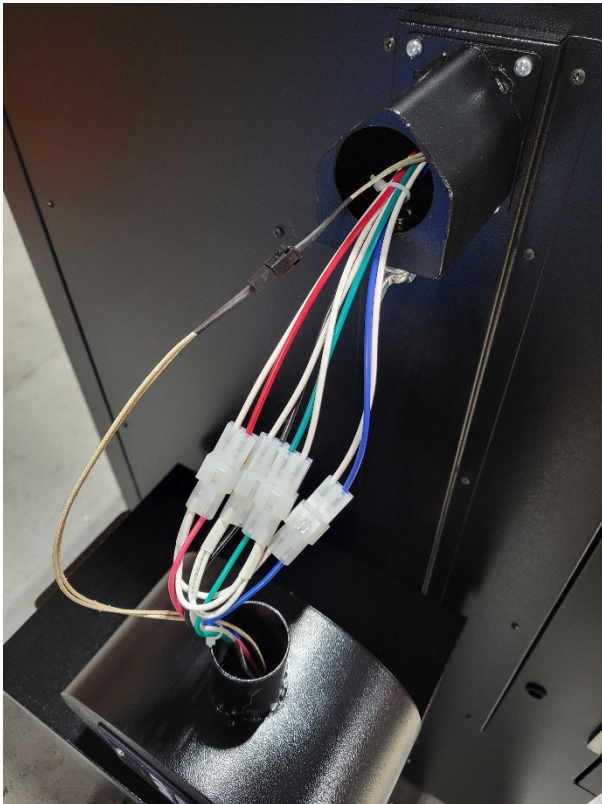


8. Connect the corresponding color-coded Molex Connectors and RTD probe wires. Hide any extra wiring inside of the controller housing. Please see picture to the left.
9. Attach the three temperature gauges to the door. Be sure to tighten only finger tight.



10. Remove the bolts and washers that are attached to the door handle and side handle. Using the separate longer bolts and washers provided, attach the door handle and side handle to the cabinet.

11. Install the Heat Diffuser, Drip Pan, and Hopper Safety Guard as shown below.

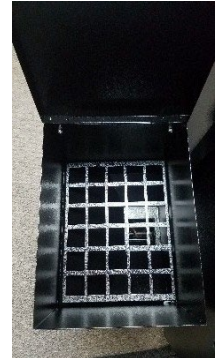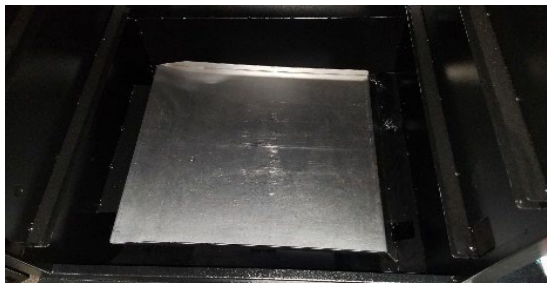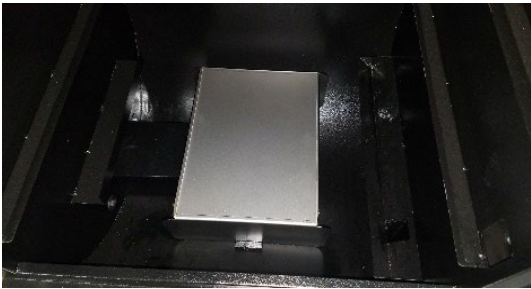

12) Attach the side vent and dampener as shown using the (6) bolts that are already threaded into the side wall.

13) Install all four stainless steel racks


14) Wipe down the racks and inside of the smoker with vegetable oil to season it.

****The Caution sticker on the hopper assembly can be removed if desired.****

Circulation Fan

When mounting the circulation fan, remove the fan housing and attach the fan to the top corner of the cabinet using the four screws provided. Once mounted, re-attach the housing.

Install fan onto the end of the shaft and secure with the REVERSE THREAD nut.

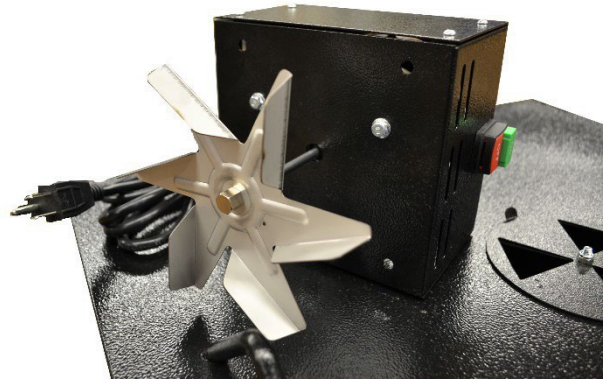

Recommendation

We recommend using a disposable aluminum pan on the bottom shelf to catch any grease or drippings. This will prevent an abundance of grease falling onto the drip pan which may result in a grease fire.

Not only will this prevent a grease fire, but it will also increase the humidity which will help keep your meat moist.